

## TORNADO HH-HHS-HI-HJ-HK-HL



### DOTAZIONE STANDARD

- Torretta girevole su ralla sui 360°.
- Sollevamento idraulico delle ruote.
- Telaio zincato su strutture HH-HHS-HI-HJ – verniciato su HK-HL
- Rullo verniciato con doppia corona sui modelli HL125/600-HL125/650-HL14/500.
- Turbina flangiata sul riduttore con regolatore e compensatore di velocità.
- Riduttore con disinnesto automatico, dispositivo per riavvolgimento rapido con PTO e disinnesto per raccolta fuori sagoma.
- Contametri digitale.
- Sistema guidatubo.
- Carrello porta irrigatore su 2 ruote con carreggiata regolabile.
- Impianto idraulico con innesti rapidi da collegare alla trattrice e deviatore a 5 leve per movimentazione: rotazione della struttura, ruota destra, ruote sinistra, piedino alza-timone e staffe di stazionamento con carica carrello.
- Timone con attacco regolabile in altezza.
- Irrigatore a settori con set di bocchagli:
  - per tubo PE diam 90-100-110: Reflex
  - per tubo PE diam 120-125-140: Explorer
- Tubo alimentazione 4 mt con raccordo sferico femmina lato linea.
- Doppio ingresso acqua.

### STANDARD EQUIPMENT


- 360° turntable.
- Galvanized frame on HH-HHS-HI-HJ – Painted on HK-HL.
- Painted reel with double crown on models con HL125/600-HL125/650-HL14/500.
- Flanged turbine on the gearbox with speed control and compensator.
- Four speed gearbox, with mechanical drive disengagement, device for rewinding through PTO and rewinding out of the drum.
- Digital speed meter.
- Leadscrew hose layering device.
- Two wheels sprinkler trolley with adjustable track.
- Hydraulic system with quick clutches to be connected to the tractor and with five control levers for: rotation, right and left wheel lift, jack, trolley lift and staker legs.
- Drawbar with adjustable connection in height and lateral staker legs.
- Sector sprinkler with set of nozzles:
  - for Pe hose diam 90-100-110: Reflex
  - for PE hose diam 120-125-140: Explorer
- Supply hose 4mt. with female ball joint on line side.
- Double water inlet.

MODELLI - MODELS	Irrigatore - Sprinkler	Termine tubo – Hose ends
HH 90/380	Reflex/Twin 140	C
HH 90/400	Reflex/Twin 140	L
HH 90/440	Reflex/Twin 140	L
HH 90/480	Reflex/Twin 140	C
HH 100/320	Reflex/Twin 140	C
HH 100/350	Reflex/Twin 140	C
HH 100/400	Reflex/Twin 140	C
HH 100/450	Reflex/Twin 140	C
HH 110/270	Reflex/Twin 160	C
HH 110/300	Reflex/Twin 160	L
HH 110/340	Reflex/Twin 160	C
HH 120/220	Explorer/Twin 202	C
HH 120/270	Explorer/Twin 202	C
HH 125/220	Explorer/Twin 202	L
HHS 100/480	Reflex/Twin 140	L
HHS 110/400	Reflex/Twin 160	C
HHS 120/320	Explorer/Twin 202	C
HHS 120/350	Explorer/Twin 202	L
HHS 125/250	Explorer/Twin 202	C
HHS 125/280	Explorer/Twin 202	L
HI 100/500	Reflex/Twin 140	C
HI 100/550	Reflex/Twin 140	L
HI 110/420	Reflex/Twin 160	L
HI 110/450	Reflex/Twin 160	C
HI 110/470	Reflex/Twin 160	L
HI 110/500	Reflex/Twin 160	C
HI 110/540	Reflex/Twin 160	L
HI 125/300	Explorer/Twin 202	C
HI 125/340	Explorer/Twin 202	L
HI 125/380	Explorer/Twin 202	C
HI 125/400	Explorer/Twin 202	C
HI 140/280	Explorer/Twin 202	C
HI 140/300	Explorer/Twin 202	C
HJ 110/560	Reflex/Twin 160	C
HJ 110/600	Reflex/Twin 160	C
HJ 125/420	Explorer/Twin 202	C
HJ 125/450	Explorer/Twin 202	C
HJ 140/320	Explorer/Twin 202	C
HJ 140/350	Explorer/Twin 202	C
HK 110/630	Reflex/Twin 160	C
HK 110/680	Reflex/Twin 160	L
HK 125/470	Explorer/Twin 202	C
HK 125/500	Explorer/Twin 202	L
HK 140/360	Explorer/Twin 202	C
HK 140/400	Explorer/Twin 202	L
HL 125/550	Explorer/Twin 202	L
HL 125/600	Explorer/Twin 202	C
HL 125/650	Explorer/Twin 202	L

MODELLI - MODELS	Irrigatore - Sprinkler	Termine tubo - Hose ends
HL 140/450	Explorer/Twin 202	C
HL 140/500	Explorer/Twin 202	L

L = il tubo termina vicino alle sponde laterali - C = il tubo termina vicino al centro

L = hose ends near the lateral shoulders - C = hose ends near centre

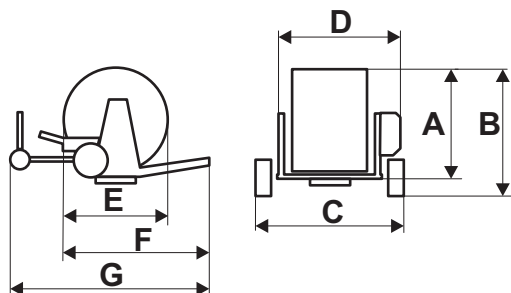

DIMENSIONI INDICATIVE (mm) / INDICATIVE DIMENSIONS (mt)

	A	B	C	D	E	F	G	Kg.
90/380	2630	3070	2450	2000	2660	3790	5800	2700 - 3000
90/400								
90/440	2680	3120	2450	2000	2610	3790	5800	
90/480	2680	3120	2450	2000	2610	3790	5800	
100/320	2630	3070	2450	2000	2560	3700	5800	
100/350								
100/400	2740	3180	2450	2000	2670	3790	5800	
100/450	2740	3180	2450	2000	2670	3790	5800	
110/270	2680	3120	2450	2000	2610	3790	5800	
110/300								
110/340	2680	3120	2450	2000	2610	3790	5800	
120/220	2680	3180	2450	2000	2610	3790	5800	
120/270	2740	3180	2450	2000	2670	3790	5800	
125/220	2680	3120	2450	2000	2610	3790	5800	
100/480	2890	3330	2450	2000	2770	3790	5800	2900 - 3200
110/400	2890	3330	2450	2000	2770	3790	5800	
120/320	2890	3330	2450	2000	2770	3790	5800	
120/350								
125/250	2890	3330	2450	2000	2770	3790	5800	
125/280	2890	3330	2450	2000	2770	3790	5800	
100/500	2900	3350	2450	2220	2850	3950	5850	3350 - 4200
100/550								
110/420	2870	3320	2450	2220	2820	3950	5850	
110/450	2870	3320	2450	2220	2820	3950	5850	
110/470								
110/500	3130	3590	2450	2220	3020	4050	5950	
110/540	3180	3640	2450	2220	3070	4050	5950	
125/300	3130	3590	2450	2220	3020	4050	5950	
125/340								
125/380	3180	3640	2450	2220	3070	4050	5950	
125/400								

	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>Kg.</b>	
140/280	3180	3640	2450	2220	3070	4050	5950		
140/300									
110/560	3340	3870	2550	2400	3140	4110	6050	5000 - 5500	
110/600									
125/420	3340	3870	2550	2400	3140	4110	6050		
125/450									
140/320	3340	3870	2550	2400	3140	4110	6050		
140/350									
110/630	3330	3770	2600	2550	3180	4320	6300		
110/680									
125/470									
125/500									
140/360	3330	3770	2600	2550	3180	4320	6300	5700 - 5800	
140/400									
125/550	3580	4130	2600	2550	3400	4320	6400		7450 - 7550
125/600									
125/650	3580	4130	2600	2550	3400	4320	6400		
140/450									
140/500	3580	4130	2600	2550	3400	4320	6400		